## ■ EJ-ET322KVM

## **Features and Benefits**


To locate PC, SERVER or KVM SWITCH up to 500 feet away from your controlling keyboard, mouse and VGA monitor. "KVM-CAT5T transmitter" is to synthesize PS/2 keyboard signal, PS/2 mouse signal and VGA monitor signal for being easily transmitted to a long distance over popular Ethernet CAT5 cable. "KVM-CAT5R receiver" is to get the synthetic signal back to PS/2 keyboard, PS/2 mouse and VGA monitor signal.

KVM CAT5 extender is able to move your console --- keyboard, Mouse and Monitor. To suitable control field convenientlyover LANnetwork. You just need install a pair of extender --- transmitter and receiver into local side and remote side individually. It also savesyour cable layout and cable installation cost.

- »Compact desktop size
- »Work with single PC, KVM Switch's console port or PC port
- »Work with CAT5, CAT5e, Cat6 Ethernet cable
- »Distance of up to 500 feet approximately
- »Support standard 3-in-one KVM switch cable
- »Easily install in minutes and knobs to adjust for set up video signal
- »Compatible with DOS, MS Windows, Linux, Unix and Netware
- »No software installation
- »High VGA resolution up to 1280 X 1024(Cat 5 cable up to 500 feet approximately)
- »Power LED and data transmission LED indication





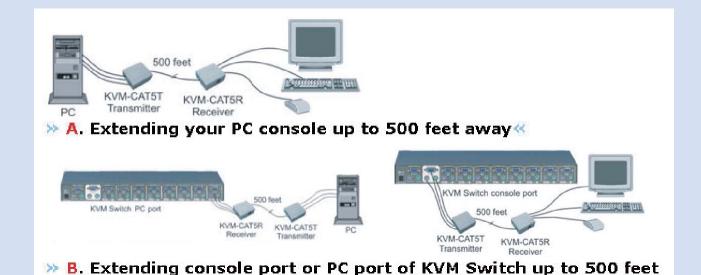

DYNAPOWERUSA



## ■ EJ-ET322KVM



Specification:		
Model	Transmitter KVM-CAT5_T	Receiver KVM-CAT5_R
PS/2 Keyboard port	1	1
VGA port	1	1
PS/2 Mouse port	1	1
PC Console connector (All Female Types)	PS/2 purple mini-din 6 pin for keyboard PS/2 green mini-din 6 pin for mouse VGA blue HDDB 15 pin	
Console Port connector (All Female Types)	PS/2 purple mini-din 6 pin for keyboard PS/2 green mini-din 6 pin for mouse VGA blue HDDB 15 pin	
RJ-45 Port	1	1
RJ-45 port connector	8P8C ( same as Ethernet 100BASET port)	
LED	Power, Data	
Knobs (for VGA tuning)	No	1
Power Adapter	No	DC9V, 500mA
Housing	Plastic	
Size	Desktop	
Weight (kg)	134g	120g
Dimension (mm)	111.5(L) x 75(W) x 35.5 (H) mm	111.5(L) x 75(W) x 39.5 (H) mm